

Installation and Care Manual

Farmhouse Style Sinks



General Recommendations:

Please read installation and care instructions thoroughly. Inspect your sink for any noticeable damage before installation. Check all local applicable plumbing and building codes.

These instructions are based on application to composite material or solid surface countertop installation only; countertop application to stone, marble, granite or butcher-block should be referred to an experienced countertop fabricator for custom installation.

Because Hahn Farmhouse sinks are individually handmade, we suggest using experienced and professional installers only. For custom cutting of countertop and installation of the actual sink, on-site installation is also recommended. Acceptable variances are approximately 1/8 of an inch. Alignment to the cut-out and precise application and trimming of any adhesive sealant are critical to a superior fit and finished look. Please take extra care in this regard.

Hahn Farmhouse sinks require custom order cabinets. Please consult your cabinet dealer.

Hahn sinks does not accept any liability for damage to countertop, sink fixture, faucets or personal injury during installation. Warranty is void if installation instructions are not followed.

Applicable Sink Models:

Stainless Steel Farmhouse

FH001, FH002, FH003, FH004, FH005

Tools / Materials Needed:


- Tape Measure
- Hacksaw / Jigsaw
- Rags
- Pencil (Not Ink)
- Framing Square
- Ear and Eye Protection
- Shims
- Denatured Alcohol
- Silicone Adhesive Sealant
- Wood Braces

Be sure to use proper tools and always wear personal safety devices for your protection.


! **CAUTION:** Undermount sinks require that your countertop is fabricated to exacting standards and the sink be installed using meticulous procedures. For these reasons, we suggest you leave the installation to a seasoned professional.

Installation Options:


Hahn Farmhouse sinks offer installation options depending on your design.

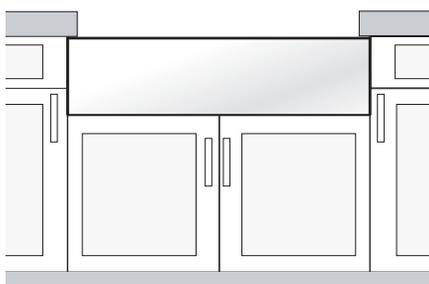

Undermount Installation

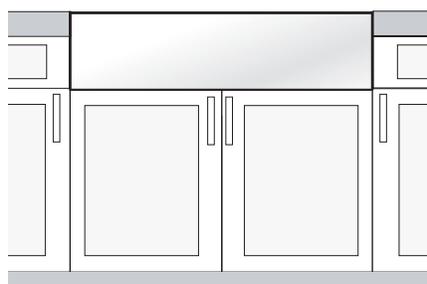



Flush-Mount Installation

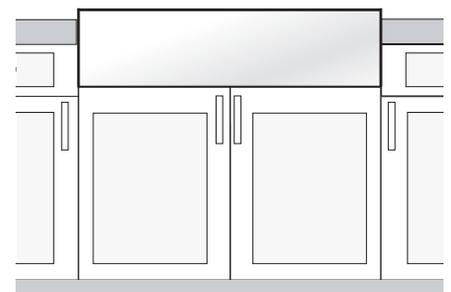

Built-Up Installation

! **CAUTION:** All installation types need to allow room for faucet installation. Ensure adequate clearance behind the sink for any faucet and backsplash, as well as full range of motion for faucet spouts and handles.

Typical undermount installation with 1/4" reveal recommended.

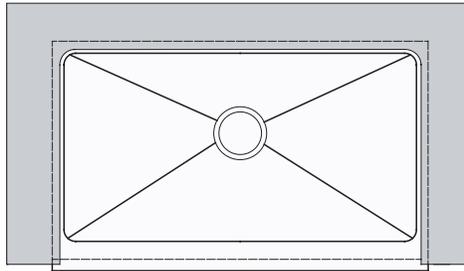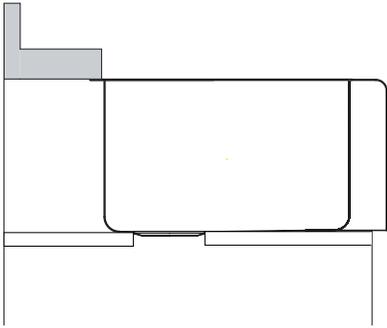

Typical flush mount and built-up installation


Built-up installation may expose sink sides to be raised up to 1" above the countertop.

1. Prepare the Sink Base Cabinet:

Hahn Farmhouse sinks offer installation options depending on your design. Farmhouse sinks require custom order sink base cabinets with a front cutout to accommodate a 10" deep sink. Build a plywood platform on a support frame inside of the sink base cabinet. Platform must support the weight of the sink and any attachments such as garbage disposals. When the sink is placed onto a platform, make sure the top of the sink is evenly flush against the bottom of the countertop. Allow clearance for water supply line and drains or garbage disposal, as necessary.

2. Make a Template and Cutout:

Depending on the installation option, make proper cutout of the countertop. Hahn recommends a 1/4" reveal on 3 sides when installed undermount style. For a flush mount or built up installation, cut countertop along with outside line of the sink profile. Front end of Hahn Farmhouse sinks are designed to be installed 3/4" extended out beyond the front end of the countertop. Cut countertop accordingly. No template is provided due to the custom nature of each application and installation. The actual sink is used as the template guide for each installation. After centering the sink and allowing for any faucets and backsplashes, use a pencil to outline the sink as your guide for the cutout, allowing for any reveal before the actual cutting.

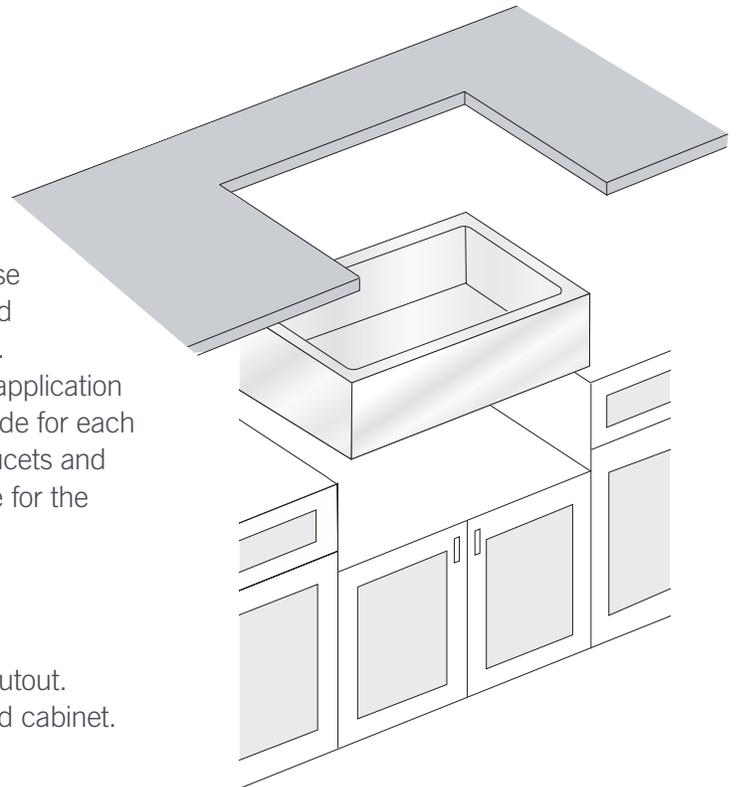

3. Set The Sink:


Set the sink on top of the cabinet or into the cabinet front cutout. Apply sealant if necessary as a gasket between the sink and cabinet.

4. Install the Countertop:

Carefully clean bottom of countertop and top flange of sink with denatured alcohol. Apply bead of silicone adhesive (not supplied) around the top edge of the sink. Place countertop onto the sink. Remove excess sealant from the lip or any surfaces with a cleaner recommended by manufacturer of adhesive sealant.


Countertop Reveal Options:

Customize the appearance of the union between your sink and countertop with these reveals:

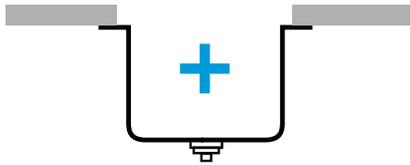


Positive Reveal

The countertop edge sits typically 1/8" back from the edge of the sink and the sink rim is exposed.

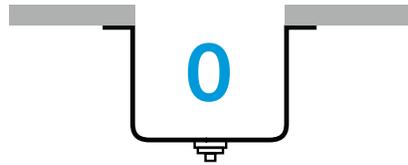

Zero Reveal

The countertop meets the edge of the sink and fits flush with the sink bowls.

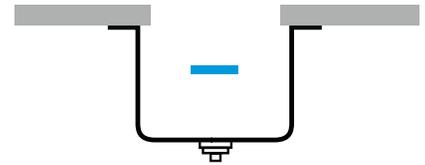

Negative Reveal

The countertop extends over the edge on all sides of the sink.

Care and Maintenance of Stainless Steel Sinks:

Much of the beauty of stainless steel lies in its long-lasting wear and enduring good looks. Follow these simple sink cleaning and maintenance tips, and your Hahn stainless steel sink will retain its original beauty for years to come.

Simple cleaning tips to keep your sink stain-free:

- Since most soaps and detergents contain chlorides, We recommend frequent rinsing of your stainless steel sink, preferably after each use.
- Combine this simple daily treatment with weekly cleansing with an abrasive cleaner. Unlike porcelain sinks, durable stainless steel stands up strongly to abrasive cleansers. Remember always to scrub in the direction of the polish lines so that your efforts blend with the surface of your sink. For less aggressive approach, try cleaning your stainless steel sink with a paste of baking soda and water. Rinse well and dry. Regularly drying your sink works wonders to prevent water and surface rust marks.
- Looking for that extra sparkle? Use flour power to polish your stainless steel sink by applying dry flour when the look you're after is a gleaming finish. Rub the flour in with a soft cloth, and then rinse and dry. Club soda will do the sparkle trick as well. After placing the stopper in your sink, pour some club soda in and rub with a soft cloth. As always, dry with soft cloth to prevent water spots and surface rust.
- Add some shine with a few drops of baby oil. Wipe off with paper toweling and repeat for added shine.

Maintaining the original beauty of your sink:

- Do not let soap cleansers dry on the sink surface. Rinse regularly to keep the chlorides found in most cleansers from affecting the sink's natural luster.
- Steer clear of steel wool pads. The iron particles that are left behind can lead to rust and corrosion. For hard-to-clean projects, try a ScotchBrite scouring pad when the job at hand requires a little extra effort, again in the direction of the grain.
- Avoid leaving steel and cast iron cookware in your sink for extended periods of time. Iron plus moisture on top of stainless can lead to surface rust and staining.
- Rubber dish mats, wet sponges and cleaning pads are not recommended for a lengthy stay in your sink. Since they trap water, discoloration and staining can result.
- Just as you do not use your cutting board to clean the dishes, do not use your sink as a cutting board. Knives and other sharp kitchen instruments will naturally damage the surface of your sink.